

Notes:

BS5837: 2012 - Category Retention Rating

Category U Trees
Trees in such a condition that any existing value would be lost within 10 years or being recommended for removal planned to occur outside this area sound arboricultural practice.

Category A Trees
Trees of high quality/value with a min. of 40 years life expectancy.


Category B Trees
Trees of moderate quality/value with a min. of 20 years life expectancy.

Category C Trees
Trees of low quality/value with a min. of 10 years life expectancy.

Sub Categories
1 - Mainly Arboricultural values
2 - Mainly Landscape values
3 - Mainly cultural and conservation values.

Tree Constraints/Root Zone
For trees being retained, all construction works need to be planned to occur outside this area sound arboricultural practice.

Tag Number
Category grade
Actual Crown Spread

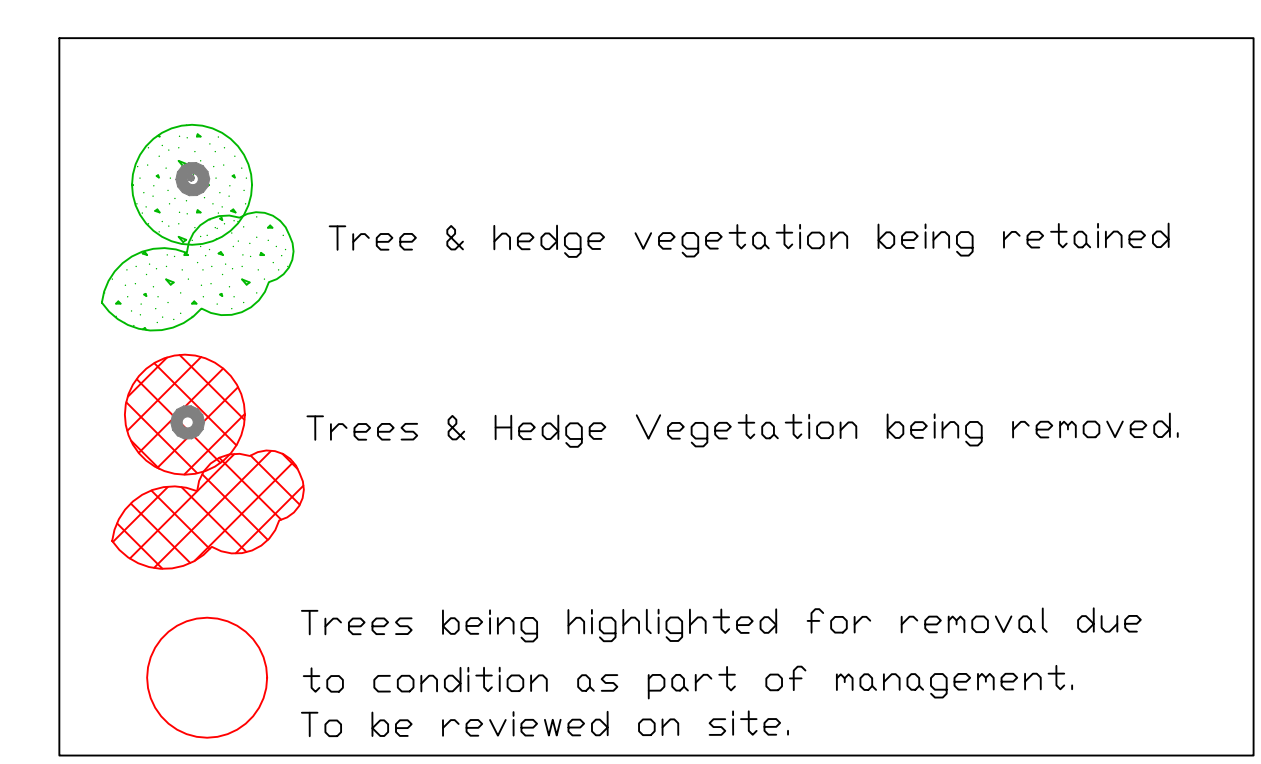

Schedule of events

Works	Schedule
Site Meeting	Prior to any works commencing.
Tree Works - Felling & Pruning	Prior to any construction works commencing.
Tree Protection	After tree removal and pruning is complete and prior to any construction works commencing. The erection and removal of the protective fencing is to be scheduled in accordance with the phasing of the construction works.
Site Monitoring	Ongoing throughout the construction works.
Removal of Tree P protection	Once all the main construction works are completed and in order to incorporate the area into the finished development.
Tree Review and Certification	Once all works are complete.

ARBORIST ASSOCIATES LTD.
94 BALLYBAWN COTTAGES, ENNISKERRY, CO. WICKLOW
TEL: 01-2742011 / 087-2629589

TITLE: Tree Removal / Arboricultural Impact Plan

Site: Lands at Boherboy, Saggart, Co. Dublin.

DATE: Dwg No. BBS002
Overall plan Scale 1:1000@AC